


# ULTIMATE SUPPLIES LLC

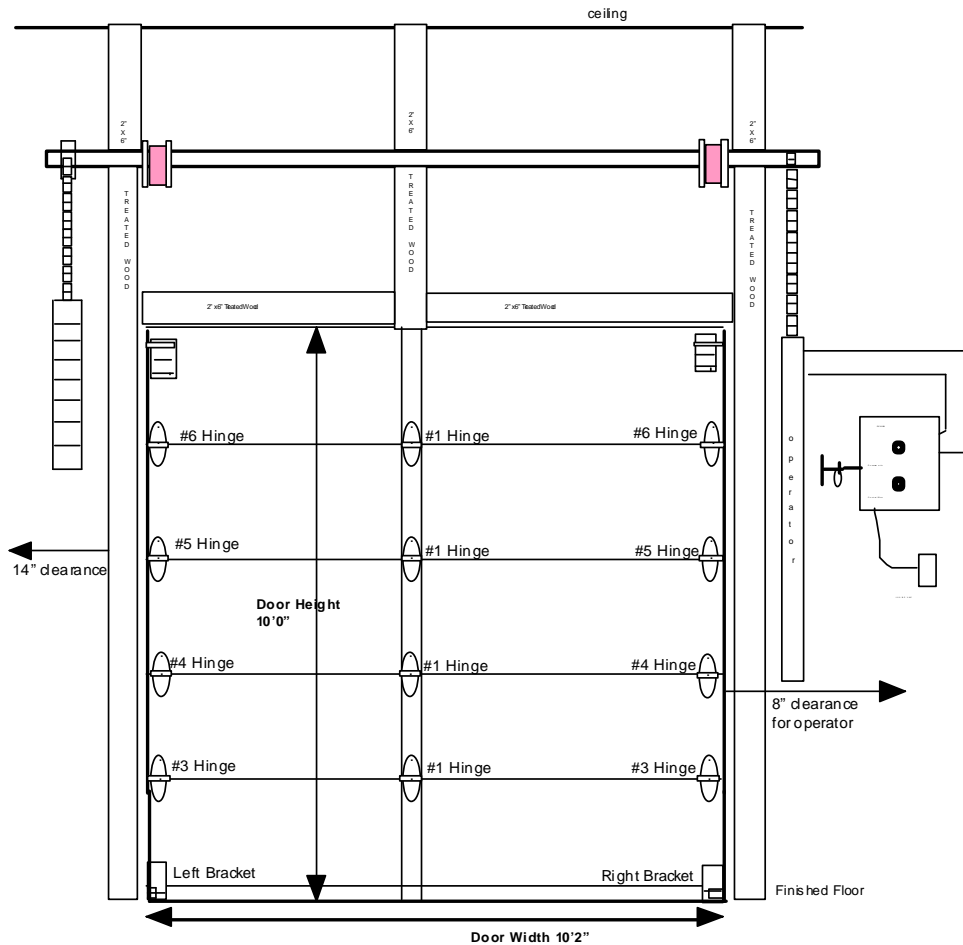

Door Model #HD1010 Heavy Duty door:  
 3" Reverse angle mount galvanized track,  
 Door sections are heavy duty aluminum frame  
 with 5/8" triple wall polycarbonate sections  
 vinyl perimeter seal, HDPE face hardware,  
 aluminum shaft brackets,UHMW bearings,  
 solid keyed 12"6" aluminum shaft, bottom EPDM  
 astragal,Counterweighted door using Kevlar belt  
 & stackable weights  
 Rollers: Stainless Steel Stem bearingless

Air Operator: ModeULT10- Air Compressor is not supplied  
 Air operator dimensions: 68 1/4" tall, 4 3/4" deep, 6 1/2" wide  
 Operator to be mounted to the side of track  
 Operator uses .4 cubic feet of air to open and .4 cubic feet of  
 air to close;Air is regulated to 60-90 psi,3/8" air line,  
 Solenoid Valve is 24V, using polymer belt for drive mechanism  
 Control Box DC5002 Control Box dimensions w/ accessories:  
 12" tall, 9" deep, 17 1/2" wide110V plug in type.